



The heritage of Warne Manufacturing Company dates back to January, 1947 where Mr John Llewellyn Warne (known to his friends as Jack) founded a small company called Sporting Arms Limited out of Adelaide, South Australia.

As we reflect today, Australian shooters value Warne products as the best in the business when it comes to precision firearm mounts and accessories. Warne products are designed for shooters by shooters.

Born in Australia! Made in the USA!

WARNE, Confidence in EVERY SHOT...



MOUNTS / RINGS / BASES



WHO IS WARNE?

SHOOTERS AT HEART - We are shooters who create, design, sell and use our products.

We enjoy the outdoors and all aspects of the shooting sports. We are proudly based out of the Pacific Northwest in Tualatin, Oregon. Our products are made here in the USA and we are completely hands on during the whole manufacturing process. The Warne® brand has been and always will be “built by shooters, for shooters”.



WARRANTY INFO

- ▶ All Warne Scope Mounts carry our quality guarantee against damage or defects in workmanship for the life of the product.
- ▶ No Receipt, No Warranty Card, No Package – No Problem.
- ▶ We will repair or replace (at our discretion) your Warne product in the event it becomes damaged or defective during normal use at no charge to you. High quality scope mounts & exceptional customer service are our top priorities.
- ▶ We want you to be satisfied and confident that we stand behind our products round after round.

ICON LEGEND

Look for these icons throughout the catalog to find which of these benefits and features fit your needs.

AB 7075 Billet	7075 billet aluminum has the high, strength-to-weight ratio, required for ultra-strong and lightweight mounts. Used in the aerospace industry, 7075 exceeds military specifications.	LEM LE/Military	Strength and dependability for law enforcement and military use.
AL Aluminium	Designed to offer a good strength to weight ratio, attractive finish and high value to shooters.	LR Long Range	Designed specifically to excel at long range precision and extreme distance shooting.
AN Anodised Finish	Adds protection and keeps the product looking new for greater long term value.	LW Lightweight	Engineered to be 30-60% lighter than similar mounts.
AR MST Ideal Height	Allows the most ergonomic shooting position for MSR's with an optic.	NS NATO/ STANAG	NATO tests show that this attachment method increases repeatable alignment. These mounts are Weaver style and Mil-Spec 1913 compatible.
CK Cerakote Finish	Reduces abrasion and wear while giving a unique colour finish to individualise your firearm.	QD Quick Detach	Quickly switch between scope and iron sights, swap scopes or remove scope for easier transport and storage. Toolless design for installation and removal.
CO Competition	Highest quality materials - finishes and features that competition shooters demand.	RTZ Return to Zero	Confidently remove and re-mount your scope while maintaining the same point of impact.
H2O Element Proof	Designed to withstand anything Mother Nature dishes out.	SI Steel Inserts	Reinforces thread engagement, eliminating stripped screws.
HC Hardcoat Anodised Finish	Reduces abrasion and wear while giving a unique colour finish to individualise your firearm.	SS Sintered Steel	Superior strength and clamping characteristics specifically formulated for scope mounts.
HU Hunting	Highest quality materials - finishes and features that competition shooters demand.	ST Steel	Made of steel for the strongest foundation available.
AB 7075 Billet	Better strength and toughness than carbon steel, ideal for hand tools.	TS Target Shooting	Engineered to provide world class performance at the range or in the field.

MOUNTS



MOUNTAIN TECH RINGS

WHY WE DESIGNED THESE:

LIGHTWEIGHT & ELEMENT PROOF - We engineered Warne® Mountain Tech™ as a lightweight and rugged scope ring design that is equally at home on a mountain rifle or precision target rifle. Featuring 7075 aluminum construction and stainless hardware to withstand the punishing conditions Mother Nature can dish out (DESIGN PATENT D802703).



KEY FEATURES

AB
7075
Billet

AR
MST
Ideal Height

NS
NATO/
STANAG

Hc
Hardcoat
Anodized Finish

RtZ
Return to
Zero

H2O
Element
Proof

Lw
Lightweight


Ck
Cerakote
Finish

BEST USES:

Hu
Hunting

Ts
Target
Shooting

LEM
LE/Military

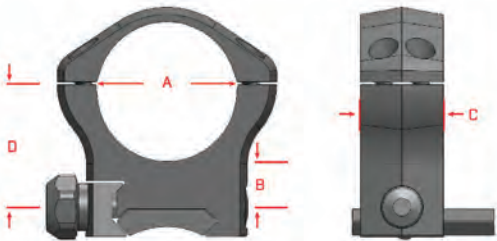

PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D	WEIGHT (PER PAIR)	RING STYLE
7200M	Low	20-36mm objective	1 inch	.275"	.705"	--	2.9 oz	FIXED
7201 (M or BB)	Medium	36-42mm objective	1 inch	.400"	.705"	--	3.9 oz	FIXED
7202M	High	42-52mm objective	1 inch	.550"	.705"	--	4.2 oz	FIXED
7204M	Ultra High	MSR Ideal Height	1 inch	--	.705"	1.4"	5.1 oz	FIXED
7213 (M or BB)	Low	24-42mm objective	30mm	.275"	.705"	--	3.5 oz	FIXED
7214 (M or BB)	Medium	42-52mm objective	30mm	.400"	.705"	--	3.9 oz	FIXED
7215M	High	50-56mm objective	30mm	.550"	.705"	--	4.5 oz	FIXED
7217M	Ultra High	MSR Ideal Height	30mm	--	.705"	1.4"	5.1 oz	FIXED
7220M	Low	30-42mm objective	34mm	.275"	.705"	--	3.9 oz	FIXED
7221M	Medium	42-52mm objective	34mm	.400"	.705"	--	4.2 oz	FIXED
7222M	High	52+mm objective	34mm	.550"	.705"	--	4.5 oz	FIXED
7224M	Ultra High	MSR Ideal Height	34mm	--	.705"	1.4"	5.1 oz	FIXED
7240M	Low	30-42mm objective	35mm	.275"	.705"	--	3.9 oz	FIXED
7241M	Medium	42-52mm objective	35mm	.400"	.705"	--	4.2 oz	FIXED
7242M	High	52+mm objective	35mm	.550"	.705"	--	4.5 oz	FIXED
7244M	Ultra High	MSR Ideal Height	35mm	--	.705"	1.4"	5.1 oz	FIXED
7250M	Low	Up to 52mm objective	40mm	.325"	.705"	1.24"	4.3 oz	FIXED

* All sizes listed are approximate, every firearm and scope set up varies.

FINISH Colour LEGEND:

Finish colour is determined by the specific letter at the END of the part number. All part numbers are available in matte finish (M) and part numbers available in cerakote burnt bronze will have a (BB) notated above.

Final part number example: 7201M is matte black and 7201BB is burnt bronze finish.

RAILS



MOUNTAIN TECH RAILS



VERSATILITY & STABILITY - Warne® Mountain Tech™ rails offer shooters the advantage of a consistent mounting platform across multiple firearms, enhanced ability to adjust proper eye relief and superior alignment of ring mounts. With self-centering hardware and aerospace grade materials, our Mountain Tech™ rails provide a lightweight and robust platform for your rifle.



KEY FEATURES

AB

7075
Billet

Ns

NATO/
STANAG

Hc

Hardcoat
Anodized FinishH₂OElement
Proof

Lw

Lightweight

Ck

Cerakote
Finish

BEST USES:

Hu

Hunting

Ts

Target
Shooting

LEm

LE/Military



FIREARM MANUFACTURER & MODEL	1 PIECE RAIL WITH ZERO MOA		1 PIECE RAIL WITH 20 MOA	
	SHORT ACTION	LONG ACTION	SHORT ACTION	LONG ACTION
Bergara Premier Series (Rem 700 style, 8-40 Screws)	7671M	7672M	7671-20MOA	7672-20MOA
Browning X-Bolt	7641M 7641BB	7642M 7642BB	7641-20MOA 7641BB-20MOA	7642-20MOA 7642BB-20MOA
Browning X-Bolt Super Short Action 7640M -- 7640-20MOA --	High	42-52mm objective		--
CZ 452/455	--	--	7755M†	7755M†
CZ 457	--	--	7757M†	7767M†
HS Precision (8-40 Screws)	7671M	7672M	7671-20MOA	7672-20MOA
Howa 1500 & 1700	7650M	7651M	7650-20MOA	7651-20MOA
Howa Mini Action	7656M	7656M	7656-20MOA	7656-20MOA
Kimber 84M	7657M	7657M	7657-20MOA	7657-20MOA
Kimber 84L	7658M	7658M	7658-20MOA	7658-20MOA
Kimber 8400 WSM	7659M	7659M	7659-20MOA	7659-20MOA
Kimber 8400 Magnum	7660M	7660M	7660-20MOA	7660-20MOA
Nosler M48	7682M	7683M	7682-20MOA	7683-20MOA
Remington Police & XCR .338 LM (8-40 Screws)	7671M	7672M	7671-20MOA	7672-20MOA
Remington 700	7673M 7673BB	7674M 7674BB	7673-20MOA 7673BB-20MOA	7674-20MOA 7674BB-20MOA
Ruger American Centerfire	7684M	7685M	7684-20MOA	7685-20MOA
Savage Accu-Trigger, Round Receiver, All Center Fire [§]	7666M	7667M	7666-20MOA	7667-20MOA
Accu-Trigger (with 8-40 Screws)	7664M	7665M	7664-20MOA	7665-20MOA
Savage 220F Slug Gun	--	7667M	--	7667-20MOA
Savage AXIS & Edge	7699M	7699M	7699-20MOA	7699-220MOA
Savage AXIS/AXIS II 2021 & Newer models (8-40 Screws)	7698M	7698M	7698-20MOA	7698-20MOA
Tikka T3, T3X	7673M	7673M	7673-20MOA	7673-20MOA
Weatherby Mark V Magnum 9 Lug, Except .240 WM	7654M	7654M	7654-20MOA	7654-20MOA
Weatherby Mark V Standard 6 Lug	7653M	7653M	7653-20MOA	7653-20MOA
Weatherby Vanguard	7650M	7651M	7650-20MOA	7651-20MOA
Winchester Model 70 Standard Pre & Post 64 with .860 RHS*	7675M	7676M	7675-20MOA	7676-20MOA
Winchester Model 70 WSM	7677M	--	7677-20MOA	--
Winchester XPR	7688M	7686M	7688-20MOA	7686-20MOA
Marlin 336, 375 & 1895	--	--	M636-20MOA	M636-20MOA
Remington 700	M673M	M674M	M673-20MOA	M674-20MOA
Ruger Mini 14 Ranch Rifle, 30, 77/22, 77/44, PC9 & PC40	A971M	A971M	--	--
Savage B-Mag	A631M	--	--	--
Tikka T3, T3X	M673M	M673M	M673-20MOA	M673-20MOA
Weatherby Mark V Magnum 9 Lug, Except .240 WM	M654M	M654M	M654-20MOA	M654-20MOA

NEW FOR
2022
NEW FOR
2022

NEW FOR
2022

TACTICAL
+ STEEL RAILS

† 15MOA Picatinny Rail Adaptor § Will not fit the Savage Model 25. * RHS=Rear Hole Spacing: The measurement between the two rear screw holes, centre to centre.
FINISH ColourS: All part numbers are matte black unless notated with a "BB" for cerakote burnt bronze.

BASES

MAXIMA BASES



STRENGTH & VERSATILITY - Warne® Maxima® steel bases are the strongest and most versatile mounting system available today. The simple low profile design along with steel construction is a significant upgrade from any other 2 piece bases.



KEY FEATURES

Ck

Cerakote
Finish

St

Steel

BEST USES:

Hu

Hunting

Ts

Target
Shooting

MANUFACTURER & MODEL	2 PIECE STEEL BASE SET
Anschutz (All) Marlin A1 & 50 Gloss	M824/824M
Browning A-Bolt, 22 Micro-Medallion, WSM	M918/918M
Browning A-Bolt Slug Gun	M904/922M
Browning A-Bolt 3	M912/912M
Browning BAR, BAR II, Mark II, BLR Lightweight, BPR Pump	M848/848M
Browning BLR (Steel Receiver)	M838/838M
Browning X-Bolt	M927/929M (BB)
Cooper 21, 36, 38 & 57	M888/842M
Cooper 16, 22, 50, 52, 54 & 56	M898/848M (S)
CVA-V2 Series Round Barrel	M980/980M
Howa 1500 & 1700	M902/876M (BB)
JC Higgins Model 50	M902/831M
Kimber 8400 with 8-40 screws	M887/841M
Kimber M84 & New 22 with 8-40 screws	M889/843M
Marlin 9, 45, 30AS, 36, 62, 93, 336, 336C, 375 & 1895	M864/864M
Marlin 1894 Cowboy, 444, Glenfield 30, Zane Grey	M864/864M
Marlin XL-7	M902/924M
Mauser 98 Altered	M902/830M
Mauser 98 Unaltered	M902/832M
Nosler M48	M902/876M (BB)
Remington 700	
Remington 7400, 7600, 7615, FOUR, SIX & New 750	
Remington 783	--
Remington New Model 7, 600, 660, 670, 673, XP-100 & XR-100	7699M

*The M9T3M, M987M & M988M part numbers are a 1 piece Weaver style bases not a 2 piece base set.

§ Will not fit the Savage Model 25.

RHS= Rear Hole Spacing: The measurement between the two rear screw holes, centre to centre.

FINISH COLOUR LEGEND:

Finish colour is determined by the specific letter at the END of the part number. All part numbers are available in matte finish (M) and part numbers available in burnt bronze will have a (BB) notated above. (M) is blued finish and (BB) is cerakote finish.

Final part number example: M902/876M is matte black finish and M902/876BB is burnt bronze finish.

MANUFACTURER & MODEL	2 PIECE STEEL BASE SET
Ruger 10/22	M858/918M
Ruger American	M902/902M
Sako A-7	M918/918M
Savage Pre 2003 Bolt Action, Flat Receiver, Non Accu-Trigger	M902/936M
Savage Accu-Trigger, Round Receiver, All Center Fire §	M902/902M
Savage 10, 110 BA, FCP (Savage Round Receiver with 8-40 Screws)	M912/912M
Savage Mark II, 93R17	M824/824M
Savage 220F Slug Gun	M902/902M
Savage Axis/Edge	M902/902M
Tikka All Flat Tops	M932/932M
Tikka T3	M9T3M*
Thompson Center Encore, Omega & Triumph Bone Collector	M987M*
Thompson Center Contender	M988M*
Thompson Center Venture	M902/902M
Weatherby Mark V Standard 6 Lug & .240 WM	M888/875M
Weatherby Mark V Magnum 9 Lug, Except .240 WM	M902/879M
Weatherby Vanguard	M902/876M (BB)
Winchester Model 70 Std. Pre & Post 64 with .860 RHS	M902/924M
Winchester Model 70 WSM	M902/924M
Winchester Model 70 Post 64 Magnum with .330 RHS	M902/802M
Winchester Model 70 Pre 64 Magnum with .440 RHS	M902/818M
Winchester Model 70 WSSM	M902/903M
Winchester XPR	M916/954M



RINGS



MAXIMA SCOPE RINGS - HORIZONTAL

MAXIMA.
HORIZONTAL

THE NEW STANDARD - Warne® Maxima® Horizontal™ Rings evolved from the concept of incorporating the world renowned performance, materials and reputation of Maxima rings in a more traditional, horizontally split configuration. Maxima Horizontal rings include several design features that enhance performance, ease installation and include the return to zero guarantee that Warne is known for.



KEY FEATURES

Ss
Sintered
Steel


RtZ
Return to
Zero

Ns
NATO/
STANAG

BEST USES:

Hu
Hunting

Ts
Target
Shooting

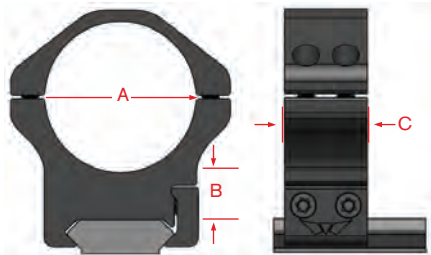

PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B	DIMENSION C	WEIGHT (PER PAIR)	RING STYLE
500M	Low	20-36mm objective	1 inch	.250"	.650"	4.9 oz	FIXED
501M	Medium	36-42mm objective	1 inch	.375"	.650"	5.8 oz	FIXED
502M	High	42-52mm objective	1 inch	.525"	.650"	6.8 oz	FIXED
513M	Low	24-42mm objective	30mm	.250"	.650"	5.0 oz	FIXED
514M	Medium	42-52mm objective	30mm	.375"	.650"	6.0 oz	FIXED
515M	High	50-56mm objective	30mm	.525"	.650"	6.9 oz	FIXED



RINGS



MAXIMA SCOPE RINGS - VERTICAL

MAXIMA
VERTICAL

INCREDIBLE HOLDING POWER & ELEGANT PROFILE - Warne® Maxima® Rings have proven to be the strongest scope rings on the market. The vertically split design offers robust simplicity and ease of installation. American made quality and precision at an affordable price make Warne® Maxima® scope rings the best in their class.



KEY FEATURES

Ss

Sintered
Steel

RtZ

Return to
Zero

Ns

NATO/
STANAG


BEST USES:

Hu

Hunting

Ts

Target
Shooting

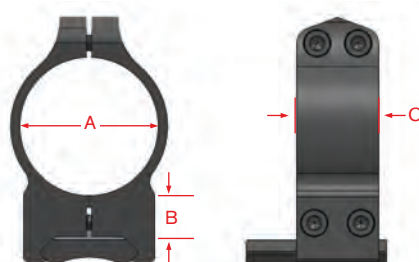

PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B	DIMENSION C	WEIGHT (PER PAIR)	RING STYLE
200M	Low	20-36mm objective	1 inch	.250"	.705"	4.3 oz	FIXED
201M	Medium	36-42mm objective	1 inch	.375"	.705"	5.2 oz	FIXED
202M	High	42-52mm objective	1 inch	.525"	.705"	6.2 oz	FIXED
203M	Extra High	50-56mm objective	1 inch	.650"	.705"	6.8 oz	FIXED
213M	Low	24-42mm objective	30mm	.250"	.705"	4.6 oz	FIXED
214M	Medium	42-52mm objective	30mm	.375"	.705"	5.3 oz	FIXED
215M	High	50-56mm objective	30mm	.525"	.705"	6.2 oz	FIXED
216M	Extra High	Up to 62mm OD	30mm	.650"	.705"	7.1 oz	FIXED
220M	Low	30-42mm objective	34mm	.250"	.705"	4.7 oz	FIXED
221M	Medium	42-52mm objective	34mm	.375"	.705"	5.5 oz	FIXED
222M	High	52+mm objective	34mm	.525"	.705"	6.4 oz	FIXED
231M		36-65mm objective	36mm	.375"	.705"	5.9 oz	FIXED
200LM	Low	20-36mm objective	1 inch	.250"	.705"	4.9 oz	QUICK DETACH
201LM	Medium	36-42mm objective	1 inch	.375"	.705"	5.8 oz	QUICK DETACH
202LM	High	42-52mm objective	1 inch	.525"	.705"	6.8 oz	QUICK DETACH
203LM	Extra High	50-56mm objective	1 inch	.650"	.705"	7.4 oz	QUICK DETACH
204LM	Ultra High	MSR Ideal Height	1 inch	.935"	.705"	9.3 oz	QUICK DETACH
213LM	Low	24-42mm objective	30mm	.250"	.705"	5.2 oz	QUICK DETACH
214LM	Medium	42-52mm objective	30mm	.375"	.705"	5.9 oz	QUICK DETACH
215LM	High	50-56mm objective	30mm	.525"	.705"	6.9 oz	QUICK DETACH
216LM	Extra High	Up to 62mm OD	30mm	.650"	.705"	7.7 oz	QUICK DETACH
217LM	Ultra High	MSR Ideal Height	30mm	.850"	.705"	9.7 oz	QUICK DETACH
220LM	Low	30-42mm objective	34mm	.250"	.705"	5.3 oz	QUICK DETACH
221LM	Medium	42-52mm objective	34mm	.375"	.705"	6.0 oz	QUICK DETACH
222LM	High	52+mm objective	34mm	.525"	.705"	7.1 oz	QUICK DETACH
231LM	Medium	36-65mm objective	36mm	.375"	.705"	6.4 oz	QUICK DETACH

RINGS



MAXIMA SCOPE RINGS - TIKKA - CZ - RUGER

MAXIMA
TIKKA-CZ-RUGER

TIKKA RINGS:

SIMPLICITY! - Tikka rifles have a grooved receiver that allows for a dovetail ring to mount directly to it, negating the need for a base.

Tikka Rail and base options:

76T3M - Aluminum rail for Tikka T3, T3X models

76T3-20MOA - 20MOA aluminum rail for Tikka T3, T3X models

M6T3M - Steel rail for Tikka T3, T3X models

M6T3-20MOA - 20MOA steel rail for Tikka T3, T3X models

M9T3M - Steel Weaver style 1 piece base for Tikka T3 models

M932/932M - Steel Weaver style 2 piece bases for all flat top Tikka models

CZ RINGS:

DIRECT FIT UPGRADE - Designed to fit the 19mm 550/557 and the 16mm 527 integral dovetails.

11mm Picatinny Rail Adaptor Options:

7755M - 15MOA rail for CZ 452/455 models

7757M - 15MOA rail for CZ 457 models

RUGER RINGS:

MODEL SPECIFIC FIT - Sold in pairs, Maxima® Ruger rings are packaged in model specific configurations to fit Ruger's proprietary dovetails.



KEY FEATURES

Ss
Sintered
Steel

RtZ
Return to
Zero

Ns
NATO/
STANAG

BEST USES:

Hu
Hunting

Ts
Target
Shooting



	PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B	DIMENSION C	WEIGHT (PER PAIR)	RING STYLE
+ Fits only TIKKA MODELS	1TM	Medium	20-42mm objective	1 inch	.460"	.705"	5.6 oz	FIXED
	2TM	High	42-52mm objective	1 inch	.570"	.705"	6.3 oz	FIXED
	14TM	Medium	24-52mm objective	30mm	.460"	.705"	5.7 oz	FIXED
	15TM	High	50-56mm objective	30mm	.570"	.705"	6.4 oz	FIXED
+ Fits only CZ 527 MODELS	1TLM	Medium	20-42mm objective	1 inch	.460"	.705"	6.0 oz	QUICK DETACH
	2TLM	High	42-52mm objective	1 inch	.570"	.705"	6.8 oz	QUICK DETACH
	14TLM	Medium	24-52mm objective	30mm	.460"	.705"	6.1 oz	QUICK DETACH
	15TLM	High	50-56mm objective	30mm	.570"	.705"	6.8 oz	QUICK DETACH
	1B1M	Medium	20-42mm objective	1 inch	.425"	.705"	5.3 oz	FIXED
	2B1M	High	42-52mm objective	1 inch	.535"	.705"	6.0 oz	FIXED
	14B1M	Medium	24-52mm objective	30mm	.425"	.705"	5.4 oz	FIXED
	15B1M	High	50-56mm objective	30mm	.535"	.705"	6.1 oz	FIXED
	1B1LM	Medium	20-42mm objective	1 inch	.425"	.705"	5.8 oz	QUICK DETACH
	2B1LM	High	42-52mm objective	1 inch	.535"	.705"	6.5 oz	QUICK DETACH
	14B1LM	Medium	24-52mm objective	30mm	.425"	.705"	5.9 oz	QUICK DETACH
	15B1LM	High	50-56mm objective	30mm	.535"	.705"	6.6 oz	QUICK DETACH

* All sizes listed are approximate, every firearm and scope set up varies.

RINGS



MAXIMA SCOPE RINGS - TIKKA - CZ - RUGER

Cont'd



	PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B	DIMENSION C	WEIGHT (PER PAIR)	RING STYLE
+ Fits only CZ 550 MODELS	1BM	Medium	20-42mm objective	1 inch	.425"	.705"	5.4 oz	FIXED
	2BM	High	42-52mm objective	1 inch	.535"	.705"	6.1 oz	FIXED
	14BM	Medium	24-52mm objective	30mm	.425"	.705"	5.4 oz	FIXED
	15BM	High	50-56mm objective	30mm	.535"	.705"	6.3 oz	FIXED
+ Fits only RUGER No. 1 & MINI 14 MODELS	1BLM	Medium	20-42mm objective	1 inch	.425"	.705"	5.9 oz	QUICK DETACH
	2BLM	High	42-52mm objective	1 inch	.535"	.705"	6.7 oz	QUICK DETACH
	14BLM	Medium	24-52mm objective	30mm	.425"	.705"	6.1 oz	QUICK DETACH
	15BLM	High	50-56mm objective	30mm	.535"	.705"	6.9 oz	QUICK DETACH
+ Fits only RUGER M77 & HAWKEYE	1RM	Medium	20-42mm objective	1 inch	.460"	.705"	5.6 oz	FIXED
	2RM	High	42-52mm objective	1 inch	.585"	.705"	6.5 oz	FIXED
	14RM	Medium	24-52mm objective	30mm	.460"	.705"	5.7 oz	FIXED
	15RM	High	50-56mm objective	30mm	.585"	.705"	6.5 oz	FIXED
+ Fits only RUGER M77 & HAWKEYE	1RLM	Medium	20-42mm objective	1 inch	.460"	.705"	6.0 oz	QUICK DETACH
	2RLM	High	42-52mm objective	1 inch	.585"	.705"	6.9 oz	QUICK DETACH
	14RLM	Medium	24-52mm objective	30mm	.460"	.705"	6.1 oz	QUICK DETACH
	15RLM	High	50-56mm objective	30mm	.585"	.705"	6.8 oz	QUICK DETACH
+ Fits only RUGER M77 & HAWKEYE	1R7M	Medium	20-42mm objective	1 inch	.460"	.705"	6.0 oz	FIXED
	2R7M	High	42-52mm objective	1 inch	.585"	.705"	6.9 oz	FIXED
	14R7M	Medium	24-52mm objective	30mm	.460"	.705"	6.1 oz	FIXED
	15R7M	High	50-56mm objective	30mm	.585"	.705"	6.9 oz	FIXED
+ Fits only RUGER M77 & HAWKEYE	1R7LM	Medium	20-42mm objective	1 inch	.460"	.705"	6.4 oz	QUICK DETACH
	2R7LM	High	42-52mm objective	1 inch	.570"	.705"	7.2 oz	QUICK DETACH
	14R7LM	Medium	24-52mm objective	30mm	.460"	.705"	6.6 oz	QUICK DETACH
	15R7LM	High	50-56mm objective	30mm	.570"	.705"	7.3 oz	QUICK DETACH

* All sizes listed are approximate, every firearm and scope set up varies.



RINGS



MAXIMA RIMFIRE RINGS



OVER BUILT FOR THE TASK - The Warne® Rimfire rings were created to fit both the 3/8th inch and 11mm dovetails found on many common rimfire rifles. Featuring a unique 70/30 horizontal split design, these steel rimfire rings are the best available.



KEY FEATURES

Ss
Sintered Steel


RtZ
Return to Zero

Ns
NATO/STANAG

BEST USES:

Hu
Hunting

Ts
Target Shooting

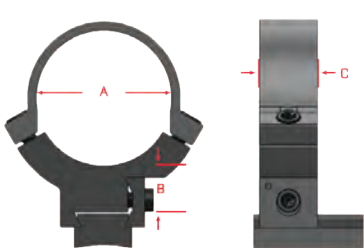

WARNE TIP: When installing either style Rimfire rings, be sure to notice which direction the small dot on the side clamp is facing. If it is in the ‘up’ position the rings will fit a 3/8” dovetail and if the dot is facing ‘down’ it will fit an 11mm dovetail.

PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B†	DIMENSION C	WEIGHT (PER PAIR)	RING STYLE
721M	Medium	20-42mm objective	1 inch	.400"	.502"	3.2 oz	FIXED
722M	High	42-52mm objective	1 inch	.525"	.502"	3.6 oz	FIXED
721LM	Medium	20-42mm objective	1 inch	.400"	.502"	3.8 oz	QUICK DETACH
722LM	High	42-52mm objective	1 inch	.525"	.502"	4.3 oz	QUICK DETACH
731M	Medium	20-42mm objective	30mm	.400"	.502"	3.6 oz	FIXED
732M	High	42-52mm objective	30mm	.525"	.502"	4.1 oz	FIXED



RINGS

VAPOR RINGS & MOUNTS



VAPOR

AFFORDABLE, MADE IN USA QUALITY - Our Vapor® line of mounts were developed and engineered to provide you with a strong and economical mounting solution that outperforms other mounts in their class.



KEY FEATURES

AL

Aluminium

Hc

Hardcoat
Anodized Finish

AR

MST
Ideal Height

LW

Lightweight

BEST USES:

Hu

Hunting

2 PIECE BASES

V427-429M



MANUFACTURER & MODEL	PART NUMBER
Browning X-Bolt	V427/429M
Browning A-Bolt 3 with 8-40 screws	V412/412M
Christensen Arms All Mesa, Ridgeline	V402/476M
Howa 1500	V402/476M
Marlin Lever Action 336, 1894, 1895	V464/464M
Remington 700	V402/476M

MANUFACTURER & MODEL	PART NUMBER
Ruger American Rimfire	V425/425M
Ruger American Centerfire	V402/402M
Savage 10/110 with 8-40 screws	V412/412M
Savage 10/110 with 6-48 screws	V402/402M
Weatherby Vanguard	V402/476M
Winchester Model 70 with .860 RHS	V402/424M

RHS= Rear Hole Spacing: The measurement between the two rear screw holes, centre to centre.

V400M



RINGS & MSR MOUNTS

PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B †	DIMENSION C	WEIGHT	RING STYLE
V400M	Low	20-36mm objective	1 inch	.225"	.600"	1.6 oz	2 PIECE WEAVER
V401M	Medium	36-42mm objective	1 inch	.350"	.600"	1.9 oz	
V402M	High	42-52mm objective	1 inch	.550"	.600"	2.2 oz	
V413M	Low	24-42mm objective	30mm	.225"	.600"	1.8 oz	2 PIECE WEAVER
V414M	Medium	42-52mm objective	30mm	.350"	.600"	2.0 oz	
V415M	High	50-56mm objective	30mm	.550"	.600"	6.7 oz	
V420M	Low		1 inch				2 PIECE RIMFIRE
V421M	Medium		1 inch				
V422M	High		1 inch				
V4001M	Ultra High	MSR Ideal Height	1 inch	1.40"	.750"	4.7 oz	1 PIECE MSR
V4011M [20MOA]	Ultra High	MSR Ideal Height	1 inch	1.39"	.750"	4.7 oz	
V4002M	Ultra High	MSR Ideal Height	1 inch	1.40"	.750"	4.7 oz	1 PIECE MSR
V4012M [20MOA]	Ultra High	MSR Ideal Height	1 inch	1.39"	.750"	4.7 oz	

NEW FOR
2022

* All sizes listed are approximate, every firearm and scope set up varies.

† For the RINGS - Measurement is from top of base to the bottom of scope tube. (see diagram example on page 14)

† For the 1 PIECE MOUNTS - Measurement is from the top of the rail to the centre of the scope tube.

MOUNTS



SKYLINE PRECISION MOUNT

SKYLINE™
PRECISION SHOOTING ACCESSORIES

1 PIECE MODULARITY - The Warne® Skyline™ Precision Mount has been engineered from the ground up with the precision rifle shooter/competitor in mind. Machined from 7075 T6 aluminum billet, featuring 2 integral recoil lugs along with 4 mounting cross bolts and 10 unique accessory mounting locations, the precision mount easily handles the rigors of competition or hard use, military type environments.




KEY FEATURES



BEST USES:



- ▶ **Precision Mount Data Card Holder** - Attaches exclusively to the Precision Mount in right or left configurations, and gives shooters a major advantage by its mounting location and ease of use. (7854M)
- ▶ **Universal Data Card Holder** - Easily attaches to the scope tube, in left or right configurations, for a universal fit. Data is displayed in a convenient location to make quick and accurate target transitions, and the articulating arm allows for low profile storage while not in use. (7855M)
- ▶ **Precision Mount Level** - Attaches exclusively to the top of the Precision Mount, in left or right configurations, to keep the scope reticle consistently level. (7852M)
- ▶ **Universal Scope Mount Level** - Easily attaches to scope tube, in left or right configurations, to keep the scope reticle level without changing position on the rifle. (USL30)
- ▶ **Precision Mount 0° Accessory Rail** - Attaches exclusively to the Precision Mount in 0° & 45° configurations. (7850M)
- ▶ **Precision Mount 90° Accessory Rail** - Attaches exclusively to the Precision Mount in a 90° configuration. (7851M)
- ▶ **Data Card Label Refill** - Adhesive labels come in a 50 pack. (7899L)

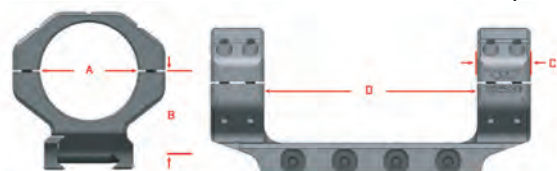

PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B †	DIMENSION C	DIMENSION D	WEIGHT	MOUNT STYLE
7814M	Medium	Up to 68mm outside	30mm	1.181"	.813"	3.23"	7.10 oz	Standard, OMOA
7817M	Ultra High	MSR Ideal Height	30mm	1.386"	.813"	3.23"	7.50 oz	Standard, OMOA
7818M 7818-20MOA	Ultra High	MSR Ideal Height	30mm	1.540"	.813"	3.23"	6.40 oz	Cantilever, OMOA Cantilever, 20MOA
7821M	Medium	Up to 72mm outside	34mm	1.181"	.813"	3.23"	7.10 oz	Standard, OMOA
7824M	Ultra High	MSR Ideal Height	34mm	1.386"	.813"	3.23"	7.50 oz	Standard, OMOA
7825M 7825-20MOA	Ultra High	MSR Ideal Height	34mm	1.540"	.813"	3.23"	6.40 oz	Cantilever, OMOA Cantilever, 20MOA
7841M	Medium	Up to 72mm outside	35mm	1.181"	.813"	3.23"	7.10 oz	Standard, OMOA
7842M 7842-20MOA	Ultra High	MSR Ideal Height	35mm	1.540"	.813"	3.23"	6.40 oz	Cantilever, OMOA Cantilever, 20MOA
7844M	Ultra High	MSR Ideal Height	35mm	1.386"	.813"	3.23"	7.50 oz	Standard, OMOA

* All sizes listed are approximate, every firearm and scope set up varies.

† Measurement is from the top of the rail to the center of the scope tube.

BIPODS

SKYLINE PRECISION BIPOD



SKYLINE™ PRECISION SHOOTING ACCESSORIES

BIPOD PERFECTION ACHIEVED - The Warne® Skyline™ Precision Bipod is the most functional, ergonomic and strongest bipod on the market today. Designed to attach to your picatinny or ARCA rail, the Skyline™ bipod allows the shooter to make quick, one-handed height adjustments, as well as smooth cant and panning ability for use on uneven terrain or less than ideal positions.



7901M
PRECISION BIPOD
PICATINNY

KEY FEATURES

AB
7075
Billet

AL
Aluminium

Hc
Hardcoat
Anodized Finish

QD
Quick
Detach

BEST USES:

LR
Long
Range

TS
Target
Shooting

LEM
LE/Military

HU
Hunting

- ▶ Quickly attaches to any Picatinny type rail (7901M) or ARCA rail (7902M)
- ▶ Rapid deploy legs lock at: 0°, 45°, 90°
- ▶ One handed adjustability
- ▶ 22° total cant/44° total pan
- ▶ Panning movement can be disabled, allowing only cant
- ▶ Design Patent 10,408,555 & 10,794,655



7902M
PRECISION BIPOD
ARCA RAIL



7957M
PRECISION BIPOD ARCA Adaptor



7955M
ARCA RAIL Adaptor FOR ATLAS
BIPOD



7956M
ARCA RAIL Adaptor FOR
SWIVEL STUD STYLE BIPOD



7953M
SLING SWIVEL Adaptor
Picatinny rail adaptor that mounts to a rifle's
existing sling swivel, allowing the use of
picatinny style bipods.



7954M
PRECISION BIPOD ATLAS® FOOT Adaptor



7950M
PRECISION BIPOD SPIKE FEET



7951M
PRECISION BIPOD CLAW FEET



7952M
PRECISION BIPOD EXTENSION LEGS
Adds an extra 7.62cm (3 inches).



TACTICAL MOUNTS

SKYLINE PRECISION BIPOD

STYLISH 1 PIECE CANTILEVER MSR MOUNT - Designed to have the "Ideal Height" for Modern Sporting Rifles, the X-SKEL® places the optic at the proper height and forward position on AR platforms. Skeletonized design along with steel hardware and threaded inserts provides a lightweight and rigid mounting platform.



TACTICAL
MSR 1 PIECE MOUNTS




KEY FEATURES

AL Aluminium	Hc Hardcoat Anodized Finish	Ck Cerakote Finish	AR MST Ideal Height	QD Quick Detach	SI Steel Inserts	LW Lightweight
------------------------	--	---------------------------------	----------------------------------	------------------------------	-------------------------------	--------------------------

BEST USES:

LR Long Range	Ts Target Shooting	Hu Hunting	LEM LE/Military	Co Competition
----------------------------	---------------------------------	----------------------	---------------------------	--------------------------

- The X-SKEL® Mount is our most popular one piece mounting system used in competition and hunting trips worldwide.
- The LR-SKEL Mount offers 20 MOA built-in slope for long range precision shooting. This allows additional elevation adjustment in your optic when shooting ranges over 600 yards.
- The SUPER HIGH X-SKEL® Places optic at correct height for heads up/CQB shooting positions.
- The QD X-SKEL Patent pending dual quick detach levers for fast toolless installation and removal.

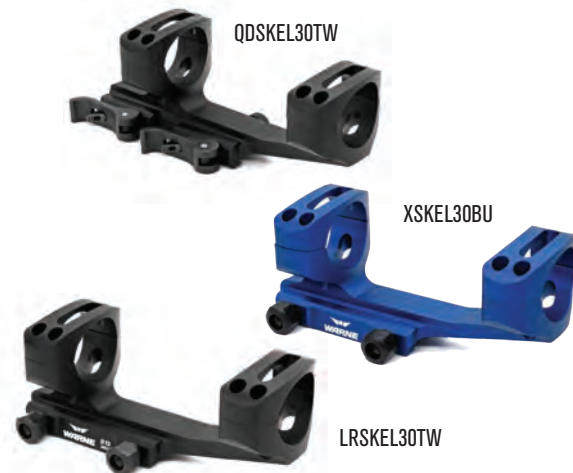

PART NUMBER	RING HEIGHT	FITS OBJECTIVE SIZE* (GENERAL RANGES)	DIMENSION A	DIMENSION B †	DIMENSION C	WEIGHT	FINISH COLOUR
XSKEL1	Ultra High	MSR Ideal Height	1 inch	1.435"	.750"	6.7 oz	Black, Red, Blue, Dark Earth, OD Green, Tactical Grey
XSKEL30	Ultra High	MSR Ideal Height	30mm	1.435"	.750"	6.7 oz	Black, Red, Blue, Dark Earth, OD Green, Tactical Grey
XSKEL34	Ultra High	MSR Ideal Height	34mm	1.435"	.750"	6.7 oz	Black, Red, Blue, Dark Earth, OD Green, Tactical Grey
QDXSKEL1	Ultra High	MSR Ideal Height	1 inch	1.435"	.750"	8.2 oz	Black, Dark Earth
QDXSKEL30	Ultra High	MSR Ideal Height	30mm	1.435"	.750"	8.2 oz	Black, Dark Earth
QDXSKEL34	Ultra High	MSR Ideal Height	34mm	1.435"	.750"	8.5 oz	Black, Dark Earth
LRSKEL1 [20MOA]	Ultra High	MSR Ideal Height	1 inch	1.435"	.750"	6.7 oz	Black, Dark Earth, Tactical Grey
LRSKEL30 [20MOA]	Ultra High	MSR Ideal Height	30mm	1.435"	.750"	6.7 oz	Black, Dark Earth, Tactical Grey
LRSKEL34 [20MOA]	Ultra High	MSR Ideal Height	34mm	1.435"	.750"	6.7 oz	Black, Dark Earth, Tactical Grey
RAMP1	Ultra High	MSR Ideal Height	1 inch	1.435"	.750"	9.5 oz	Black
RAMP30	Ultra High	MSR Ideal Height	30mm	1.435"	.750"	9.5 oz	Black
SHXSKEL30	Ultra High	MSR Ideal Height	30mm	1.90"	.750"	7.8 oz	Black, Dark Earth
SHXSKEL34	Ultra High	MSR Ideal Height	34mm	1.90"	.750"	7.8 oz	Black, Dark Earth


* All sizes listed are approximate, every firearm and scope set up varies.

† Measurement is from the top of the rail to the center of the scope tube.

DETERMINING YOUR ORDER NUMBER:

Combine Part Number with the Available Finish Letter at the end:

TW= Black R= Red B= Blue DE=Dark Earth OD=OD Green TG=Tactical Grey (Example: XSKEL1 + Red= XSKEL1R)

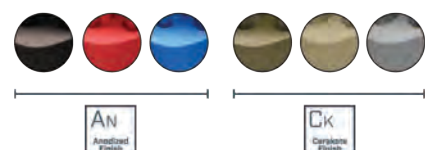

TACTICAL MOUNTS



TACTICAL ACCESSORY MOUNTS

COMPACT 45 DEGREE RAIL - The Warne® A645 is designed as a 45° offset picatinny rail for mounting secondary sighting systems and other accessories.



PART NUMBER	RING HEIGHT
A645TW	Black
A645R	Red
A645BU	Blue
A645DE	Dark Earth
A645OD	OD Green
A645TG	Tactical Grey

KEY FEATURES

AL
Aluminium

AN
Anodised Finish

CK
Cerakote Finish

LW
Lightweight

BEST USES:

Co
Competition

Ts
Target Shooting

LEM
LE/Military



TACTICAL RED DOT MOUNTS

VERSATILE RED DOT RISER - With the increasing number of electro optics being used, finding a compatible mounting system can be confusing. We designed our modular Red Dot Riser to fit a wide range of different optics based on the mount footprint or attachment style. All riser mounts that we offer share a robust mounting base, while the top is engineered specifically for different red dot styles.



PART NUMBER	RING HEIGHT
6101M	T1-T2 Interface
6102M	Picatinny Rail
6103M	Reflex

KEY FEATURES

AL
Aluminium

AN
Anodised Finish

CK
Cerakote Finish

LW
Lightweight

BEST USES:

Co
Competition

Ts
Target Shooting

LEM
LE/Military



6101M



6102M



6103M

MOUNTING TOOLS

SKYLINE PRECISION BIPOD

THE RIGHT TOOL FOR THE JOB - Designed to make the installation of our mounts and accessories easy, Warne's Range Tool and fixed torque wrenches make a great addition to every range bag.

TW65

TORQUE WRENCH 65IN/LBS

This tool allows the shooter to precisely tighten the ½" hex nut (on Warne's MSR & Tactical Mounts) to the proper torque setting of 65 in/lb. This is indicated when the red light is lit up and an audible beep has been heard.

RT-1

RANGE TOOL

Warne's Range Tool is designed to be the go-to multi-tool for every shooter's range bag. This compact and durable tool features 12 of the most popular driver bits to perform basic firearm maintenance and scope adjustment in the field.

- ▶ Aluminum handle
- ▶ Chrome vanadium steel bits
- ▶ Pin remover size: 0.10"
- ▶ Flat blade screwdriver
- ▶ #2 Phillips head screwdriver
- ▶ Allen head sizes: 0.05", 1/16", 5/64", 3/32", 1/8" & 5/32"
- ▶ Torx driver sizes: T10, T15 & T20



TW65



RT-1

